

Simbolo

Serial ATA II RAID 6 subsystem



Highest Density Available

- ◆ 3U chassis with 16 bays carriers.
- ◆ Over 6 Terabytes per chassis.

Extraordinary fault tolerance

- ◆ Advanced Data Guarding technology (RAID ADG) provides the highest level of data protection.
- ◆ RAID ADG can tolerate multiple simultaneous drive failures without downtime or data loss.

Extraordinary performance

- ◆ Serial ATA: The Next Generation Internal Storage Interconnect.
- ◆ Better connectivity, higher data transfer rates.

Features

- ▶ Supports RAID levels 0, 1, 0+1, 3, 5, 6 and JBOD.
- ▶ Supports hot spare and automatic hot rebuild.
- ▶ Allows online capacity expansion within the enclosure.
- ▶ Local audible event notification alarm.
- ▶ Supports password protection and UPS connection.
- ▶ Built-in serial port interface for remote event notification.
- ▶ Dual host channels support clustering technology.
- ▶ Tagged command queuing for 256 commands, allows for overlapping data streams.
- ▶ Transparent data protection for all popular operating systems.
- ▶ RAID ADG provides the highest level of data protection.
- ▶ RAID ADG can tolerate multiple simultaneous drive failures without downtime or data loss.
- ▶ Supports multiple array enclosures per host connection.
- ▶ Online RAID level migration.

RAID Management

- ▶ Smart-function LCD panel.
- ▶ Environmental monitoring unit .
- ▶ Real time drive activity and status indicators.
- ▶ Browser-based GUI management utility.



Proware Technology Corp.

Tel:886-2-2914-8001(Rep.) Fax:886-2-2914-7975
http://www.proware.com.tw E-mail:info@proware.com.tw



Series Technical Specifications



Model	SB-3163SA	SB-3163FA	SB-3163-F4A3
Form - factor	3U 19-inch rackmount chassis	3U 19-inch rackmount chassis	3U 19-inch rackmount chassis
RAID processor	Intel 80321 64 bit RISC	Intel 80321 64 bit RISC	Intel 80321 64 bit RISC
RAID level	0, 1, 0+1, 3, 5, 6, JBOD	0, 1, 0+1, 3, 5, 6, JBOD	0, 1, 0+1, 3, 5, 6 and JBOD
Cache memory	128MB ~ 1024MB	128MB ~ 1024MB	128MB ~ 1024MB
No. of channels (host + drive)	2 + 16	2 + 16	2 + 16
Host bus interface	Ultra 320 LVD	FC-AL x 2 (2Gb/s)	FC-AL x 2 (4 Gb/s)
Drive bus interface	SATA II	SATA II	SATA II
Data transfer rate	Up to 320MB/Sec	Up to 200MB/Sec	Up to 400MB/Sec
Back plane board	SATA II	SATA II	SATA II
Hot-swap drive trays	Sixteen (16) 1-inch trays	sixteen (16) 1-inch trays	sixteen (16) 1-inch trays
Hot-swappable power supplies	Three (3) 300W power supplies w / PFC	Three (3) 300W power supplies w / PFC	Three (3) 300W power supplies w / PFC
Cooling fans	2 (blower)	2 (blower)	2 (blower)
Battery backup	Option	Option	Option
Fibre Hub	No	Yes	No
R-Link support	Yes	Yes	Yes
SNMP Protocol Support	Yes	Yes	Yes
Background RAID Initialization	Yes	Yes	Yes
S.M.A.R.T	Yes	Yes	Yes
Array roaming	Yes	Yes	Yes
Power requirements	AC 90V ~ 254V Full Range 12A / 6A at 110V / 220V, 50Hz / 60Hz	AC 90V ~ 254V Full Range 12A / 6A at 110V / 220V, 50Hz / 60Hz	AC 90V ~ 254V Full Range 12A / 6A at 110V / 220V, 50Hz / 60Hz
Environmental			
Relative Humidity:	10% ~ 85% Non-condensing	10% ~ 85% Non-condensing	10% ~ 85% Non-condensing
Operating Temp:	10°C ~ 50°C (50°F ~ 122°F)	10°C ~ 50°C (50°F ~ 122°F)	10°C ~ 50°C (50°F ~ 122°F)
Physical Dimensions:	133(H) x 482(W) x 609(D) mm 5.24(H) x 18.98(W) x 23.98(D) inches	133(H) x 482(W) x 609(D) mm 5.24(H) x 18.98(W) x 23.98(D) inches	133(H) x 482(W) x 609(D) mm 5.24(H) x 18.98(W) x 23.98(D) inches
Weight	20.5kgs / 45.1Lbs (without drives)	20.5kgs / 45.1Lbs (without drives)	20.5kgs / 45.1Lbs (without drives)

Function:

- ◆ New disk auto spare ◆ Host independent ◆ Environment monitor ◆ Online expansion ◆ Continuous rebuild ◆ Online consistency check ◆ Failed drive auto rebuild ◆ Failed drive indicators ◆ Audible alarm ◆ Password protection ◆ UPS connection ◆ Bad block auto-remapping ◆ Multiple RAID selection ◆ Online RAID level migration ◆ E-mail Notification

Specification are subject to change without notice.

All company and product names are trademarks of their respective owners.



1
Proprietary elastic reactance design
Smooth tray-swap experience.



2
Excellent heat exchangers
Hollow tray's panel.




3
Field Proven Power Supplies
N+1 hot swappable and redundant Load Sharing PFC Power Supplies ensure system uptime for enterprise class reliability.



4
Innovative Modular architecture
Swappable power supplies, cooling fans and controller module.

The benefits of RAID ADG(RAID6)are :

- ❖ Advanced Data Guarding technology (RAID ADG) provides the highest level of data protection amount RAID levels .
- ❖ RAID ADG can tolerate multiple simultaneous drive failures without downtime or data loss. Greater fault tolerance than RAID 0+1or RAID 5.

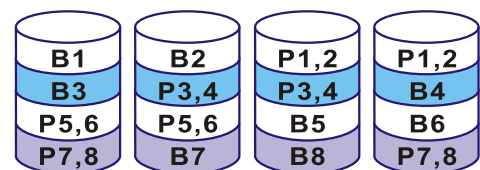

B means data blocks

P means parity data

Any two drives can fail without loss of critical data at same time